



100% MADE IN ITALY

**2014
SERIES**



3-PHASES

AVAILABLE IN 480 V

AVAILABLE IN 60 Hz

AVAILABLE IN
LEFT VERSION
GRT10SX



RASOR®

1946

GRT10 ELECTRIC 3-PHASES CUTTING UNIT

GRT10. Professional cutting unit for continuous cutting processes in Textile & Technical Textile applications.



ELECTRIC 3-PHASES CUTTING UNIT GRT10



WHAT'S NEW:

Low-friction Teflon coated foot
Easy fixing structure for O.E.M. applications
Maintenance-free industrial motor

AVAILABLE IN 480 V
AVAILABLE IN 60 Hz

TECHNICAL DETAILS:

Blade diameter: 100 mm (4"), with hard metal counterblade

Blade equipped: 10EHSS, 6-edges, HSS steel

Blade speed: 550 r.p.m.

Cutting ability: up to 35 mm (1.4")

Motor: 3phases asynchronous 380/400V, 50 Hz

Power: 75 W

Max. absorption: 0.36 A

Protection: IP20 - CL F

Net weight: 2800 g (with power supply cord)

Total weight (with packing box): 4000 g



Electric cable length: 1.5 mt (with no plug)

Minimum brightness for working operations: LUX 200

Vibrations at start up: < 2.5 m/sec 2

Temperature range: 0 – 55 C


Umidity range: 10 – 95% without condensate

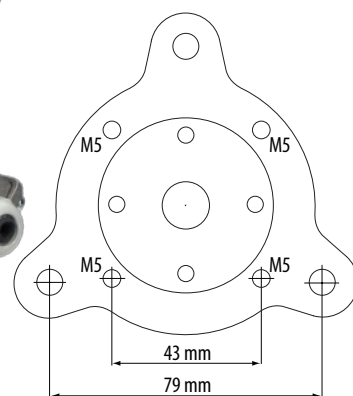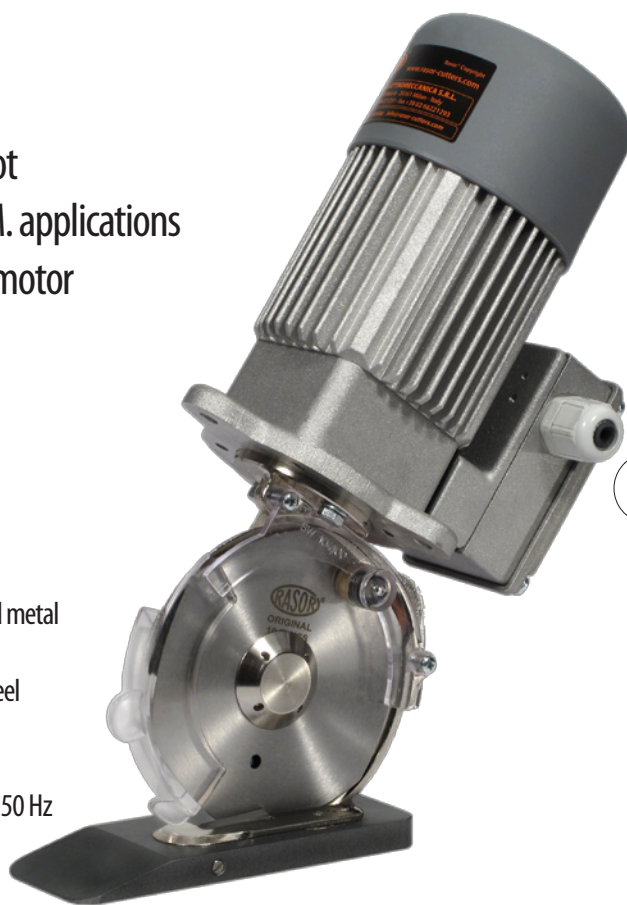

Fixing layout



Sharpening device

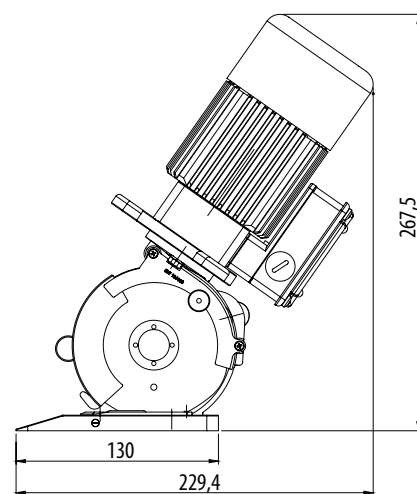

Dimension layout

BLADES AVAILABLE:

10EHSS, 100 mm 6-edges, HSS steel | **10SEXTG**, 100 mm 4-edges, EXTRA steel | **10CSW**, 100 mm circular, HSS steel | **10EHSSTF**, 100 mm 6-edges, HSS steel Teflon® coated | **10EMD**, 100 mm 6-edges, Carbide (Widia®)



FOLLOW US:



RASOR ELETTROMECCANICA SRL

Via Vincenzo Caldesi 6

20161 Milan · Italy

ph. +39 02 66 22 12 31

fax +39 02 66 22 12 93

info@rasor-cutters.com

www.rasor-cutters.com